


UP266MACRO

Large Beam Laser Ablation System



Applications

- Bulk and inclusion analysis of metals
- Forensic analysis of plastics, ceramics, paints, glass
- Biological tissues, tree rings and gels
- Sulfate, Sulfite analysis
- Environmental air filters, wear metals, soils analysis

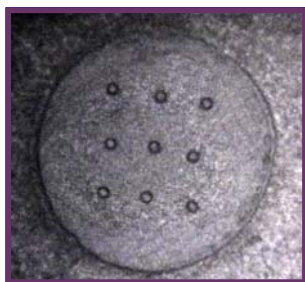

750 µm spot with 30 µm spot raster, in NIST 610 glass

The UP266MACRO Advantage

- The UP266MACRO laser ablation system is designed to couple with ALL but the most UV transmissive sample matrices.
- With energy densities of more than $15\text{J}/\text{cm}^2$ ($5.0\text{GW}/\text{cm}^2$), the UP266MACRO can effectively ablate glass, steel, noble metals, plastics, ceramics and biological matrices.
- Select from 12 pre-calibrated, aperture imaged spot sizes from 30 µm to 750 µm including **VERI™** large and **VERI*** small spots extending the range from 20 µm to 1100 µm
- Large volume ablation is particularly well suited to ICP-OES analysis. OES detection limits of less than 1 µg/g (1ppm), in the solid, are possible
- UP266MACRO system software operates under all Windows platforms ('98, NT, 2000, XP). Integrated control of sample analyses is a standard design consideration

* Vernier Extended Range Increments


The UP266 MACRO Laser Ablation System

New Wave Research introduces the UP266MACRO, a large beam, 266 nm, UV Nd-YAG laser ablation system specifically designed for ICP-OES and ICP-MS solid sampling analysis. This general purpose, expandable, laser ablation device incorporates a 30 µm to 750 µm aperture imaged beam delivery system.

The control software offers a wide variety of ablation methods such as spot ablation for depth profiling, line scanning for lateral analysis and raster scanning for bulk analysis. Laboratory productivity and sample throughput is enhanced through software control of X-Y stages, laser parameters and external triggering of sequential sampling.



NEW WAVE
RESEARCH

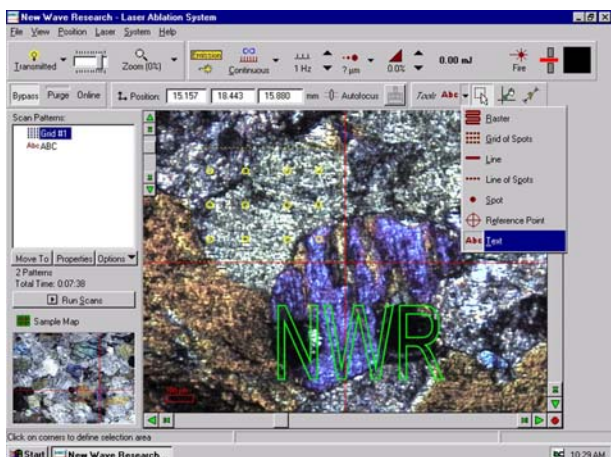

New Wave Research Laser Ablation Software

System Configuration

The system includes a high-magnification video system, micron precision X-Y stages, manual Z focus, F/O illumination, ICP/ICP-MS sample chamber and Merchantek control software for semi-automated and automated operation.

The system's software package controls all laser parameters, sample viewing and stage positioning and has many unique features such as sample mosaic navigation, alphanumeric character marking and re-coordination of sample analysis after removal and subsequent replacement of sample into chamber.

Features


- 4th harmonic, Nd:YAG laser with sufficient energy density to ablate both opaque and transparent materials
- Aperture imaged beam sizes from 30 µm to 750 µm, with a vernier-adjustable, extended range increments (**VERI**) spots from 20 µm to 1100 µm.
- Quick change sample cell holder (52mm ID X 52mm deep), designed to accept standard 1.00" and 1.75" diameter samples, and large irregular specimens.
- Sample Mosaic Navigation function for up to 50 mm virtual FOV (field of view) of samples
- Built-in laser energy detector for real-time measurement of energy and energy density.
- Pulse repetition rates from 1 to 10Hz – continuous pulsing, single shot and burst modes.
- An integrated Class 1 system with full computer control of system functions. Interfaces with all major brands of ICP-MS and ICP instruments

Warranty

One year – call for limited warranty statement



At left is a **1 mm** crater in NIST 610 glass. With the UP266MACRO, 266nm, short UV ablation has broken the **1000 µm** barrier.

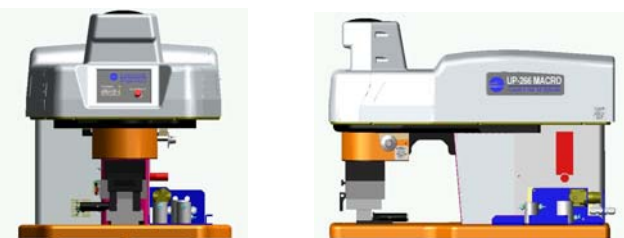

Physical Parameters

Length	25" / 64 mm
Width	18" / 46 mm
Height	22" / 56 mm
Weight	130 lb. / 59 kg

Site Requirements

Temperature	70° ± 10° F (21° ± 5° C)
Relative Humidity	20 – 80% non-condensing
Voltage	100 - 240 VAC, 50/60 Hz
Power	1000 Watts



www.new-wave.com

USA

New Wave Research, Inc
48660 Kato Road
Fremont CA 94538-7339
Tel: 510-249-1550
Tel: 800-566-1743
Fax: 510-249-1551
Email: Lasers@new-wave.com

Japan

New Wave Research, KK
5F Chojiya Building, 1-36-4,
Shinjuku-ku, Shinjuku
Tokyo, 160-0022 Japan
Tel: +81-3-3351-0131
Fax: +81-3-3351-0121
Email: NewWaveKK@new-wave.com

Taiwan

New Wave Research G. C. Co., Ltd.
2Fl., No. 118, Shinhu 3 Rd.,
Neihu Dist., Taipei
Taiwan 114
Tel: 886-2-8792-7585
Fax: 886-2-8792-7584
Email: NewWaveGC@new-wave.com

Europe

New Wave Research Co. Ltd.
Suite B Oak Park Business Centre
Alington Road
Eynesbury, St Neots
Cambs PE19 6WA, England, UK
Tel: 44-(0)1480 403325
Fax: 44-(0)1480 476899
Email: NewWaveEU@new-wave.com

Shanghai

Room 606, Dragon Pearl Complex
2123, Pudong Road, Pudong,
Shanghai, China
Tel: 86-21-5860-9889
Fax: 86-21-5860-0424