




LNK-AO Analog Output

FIXED SYSTEMS



TECHNICAL DRAWING

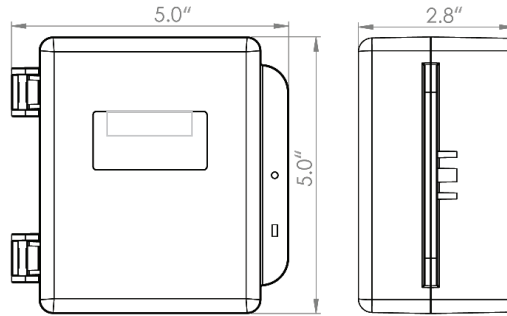

WIRING DIAGRAMS

The LNK-AO Analog Output peripheral device adds four channels of 4 - 20 mA analog output to a Modbus® RS-485 network configured with a QCC Quad Channel Controller or an FCS Flexible Control System Controller. The LNK-AO is designed to send a 4 - 20 mA signal to up to four devices such as a data / trend / logging system, a BAS or DDC or up to four VFDs.

The four 4-20 mA output signals are current sourced and can be independently scaled using the menu system on the controller. Each output can be assigned to an individual sensor or to a group of sensors through zoning configured within the controller.

Communication with the controller is monitored and if interrupted a pre-configured default current will be output in each channel.


KEY FEATURES

- » Four 4-20 mA output channels
- » Power LED indicator
- » Modbus® RS-485 RTU communication protocol
- » Scaling and zoning capabilities supported by the controller
- » Configurable default settings for any interruption in communication
- » Standard water / dust tight, corrosion resistant enclosure (drip proof)


APPLICATIONS

- » Parking Garages
- » Vehicle Repair Shops
- » Manufacturing Plants
- » Ice Arenas
- » Commercial Indoor Swimming Pools
- » Food Processing Plants
- » ... and many more


4-Wire VDC to FCS Controller

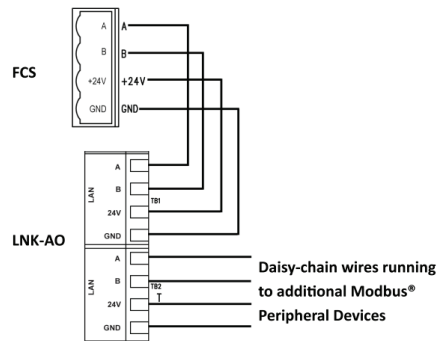

4-Wire VDC to QCC Controller

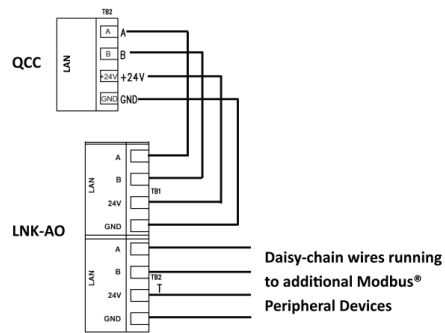

Wiring to VFD and Control Panel

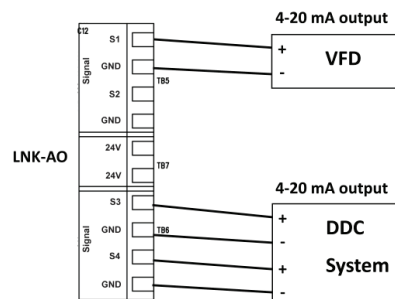



LNK-AO Analog Output

FIXED SYSTEMS

TECHNICAL SPECIFICATIONS

MECHANICAL

| | |
|-----------|---|
| Enclosure | ABS / Polycarbonate, corrosion resistant, drip proof; Copper coated interior to reduce RF interference. |
| Weight | 400 g (14 oz) |
| Size | 127 mm x 127 mm x 71 mm (5.0 x 5.0 x 2.8 inches) |

USER INTERFACE

| | |
|-----------|-------------------------------|
| Indicator | LED green indicator for power |
|-----------|-------------------------------|

ENVIRONMENTAL

| | |
|-----------------------|-------------------------------|
| Operating Temperature | -20°C to 40°C (-4°F to 104°F) |
| Humidity | 15 to 90% non-condensing |

ELECTRICAL

| | |
|--------------------|---|
| Power Requirements | 24 VDC, 3W, Class 2 (from daisy-chain wire run from controller) |
| Wiring | 4-wire VDC, 16 gauge, 4-conductor shielded network wiring (daisy-chain) |
| Circuit | Configurable microprocessor |
| Fuses | Thermal, resetting |

INPUT / OUTPUT

| | |
|----------------|--|
| Outputs | Four 4 - 20 mA (2 - 10 volts is obtainable using a 500 ohm resistor) |
| Communications | Modbus® RS-485 |

CERTIFICATION

| | |
|--------------|---|
| Conforms to: | CSA-C22.2 No. 205-12, CSA-C22.2 No. 61010-1-12 UL508 (Edition 17):2007, UL 61010-1 (Edition 3) |
| Conforms to: | EMC Directive 2004/108/EC EN 50270:2006, Type 1, EN61010 |
| Conforms to: | FCC. This device complies with Part 15 of the FCC Rules. |

COMPATIBLE CETCI PRODUCTS

The LNK-AO works with the QCC and the FCS models. Refer to the datasheet for each model for more information.

PRODUCT CODES

| | |
|---------------|--|
| LNK-AO | Analog Output Peripheral Device (4 channels) |
|---------------|--|

ACCESSORIES

| | |
|----------------------|---|
| SCS-8000-R5G | Small galvanized metal, 16 gauge protective guard |
| RPS-24VDC | Remote Power Supply, 24 VDC output |
| UPS-MGE-81600 | Power backup battery system, 120VAC input/output |



Distributed by:
Kenelec Scientific Pty Ltd
1300 73 22 33
sales@kenelec.com.au
www.kenelec.com.au



Modbus® is a registered trademark of Gould Inc. Corporation.