



YES Plus LGA is a multi-gas air quality monitoring and information recording instrument that simultaneously measures and records temperature, RH, CO₂, and much more. Featuring a 15-sensor capacity, the YES Plus LGA allows users to accurately monitor more within a single, easy to carry instrument. It contains 12 internal plug & play sensors, a fixed temperature sensor, a removable RH sensor, and a remote sensor, such as particulates. Sensors available include electrochemical, catalytic (combustibles % LEL), infrared (PPM or % volume CO₂ or combustibles), and PID. An air sample from the target environment is delivered to the sensors through "active sampling" by the internal sample draw pump. More than a million data points can be logged and stored on a built-in SD flash card for convenience. The large, backlit, multi-line scrolling LCD display indicates the sensor types installed and measured values for each gas, battery status and more. The system utilizes a long life rechargeable NiMH battery pack providing more than 24-hours of run time, depending on sensor array installed. The user can also set one alarm level for each gas to activate the internal audible alarm. The system is housed in a rugged ABS enclosure with swivel handle to act as a stand support or for carrying the instrument.


KEY FEATURES

- » Internal sample pump with inline filter
- » Large, backlit, multi-line, LCD display
- » Extensive, easy to use menu system
- » Rugged ABS enclosure with swivel handle acts as stand support
- » 15 sensor capacity
- » 26 plug & play sensor choices
- » Data logging to SD flash card
- » Menu control positive sampling

APPLICATIONS

- » Residential buildings
- » Commercial buildings
- » Hospitals
- » Laboratories
- » Research facilities
- » ... and many more

TECHNICAL DRAWING

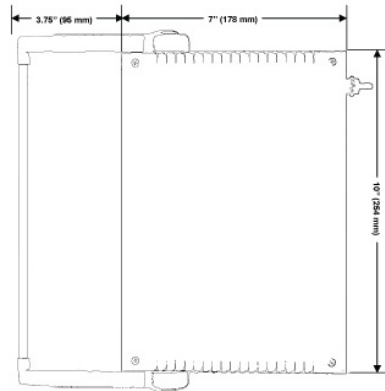

SAMPLE ENGINEERING SPECIFICATIONS

Coming soon...



Portable IAQ Instruments - GAS DETECTION DATASHEET

YES Plus LGA 15-Channel IAQ Monitor

TECHNICAL SPECIFICATIONS

MECHANICAL

Enclosure	Rugged ABS (UL94-HB rated) c/w multi-position, adjustable aluminum carrying handle/stand
Weight	1.7 kg (3.6 lb)
Size	10.0" x 3.5" x 7.0" (254 mm x 89 mm x 178 mm)

ELECTRICAL

Power	Rechargeable NiMH battery pack: 18 - 24 hours of continuous operation time (dependent upon the sensor array installed) c/w plug-in battery charger / wall adapter (12 VDC or 100 - 240 VAC)
Circuit	Powerful microprocessor, user configurable
Sampling	Internal, automatic sample pump for "active" sampling of target environment

ENVIRONMENTAL (sensor dependent)

Operating Temperature	5° C to 50° C (41° F to 122° F)
Humidity	0% to 99% RH non-condensing

CERTIFICATION

CE	Pending
----	---------

PRODUCT CODES

Temperature, RH sensors, internal pump, inline filter, rechargeable battery, internal data logging, capacity for 12 additional sensors	YES Plus LGA
--	--------------

OPTIONS

Ammonia (NH ₃) electrochemical, 0-50 ppm	PNP-H
Arsine (ASH ₃) electrochemical, 0-2 ppm	PNP-R
Carbon dioxide (CO ₂) infrared, 0-5000 ppm	PNP-A+
Carbon dioxide (CO ₂) infrared, % volume	PNP-B
Carbon dioxide (CO ₂) infrared, 0-100% volume	PNP-B1
Carbon monoxide (CO) electrochemical, 0-50 ppm	PNP-C
Chlorine (Cl ₂) electrochemical, 0-5 ppm	PNP-I
Chlorine dioxide (ClO ₂) electrochemical, 0-1 ppm	PNP-J
Combustibles (flammables) infrared, 0-5% volume	PNP-B+
Combustibles (flammables) infrared, 0-100% LEL	PNP-B2
Combustibles (flammables) catalytic, 0-100% LEL	PNP-X
Fluorine (F ₂) electrochemical, 0-2 ppm	PNP-S
Formaldehyde (CH ₂ O) electrochemical, 0-10 ppm	PNP-Q
Hydrazine (N ₂ H ₄) electrochemical, 0-1 ppm (0-1000 ppb)	PNP-T
Hydrogen (H ₂) electrochemical, 0-1000 ppm	PNP-K
Hydrogen chloride (HCl) electrochemical, 0-30 ppm	PNP-M
Hydrogen cyanide (HCN) electrochemical, 0-100 ppm	PNP-N
Hydrogen fluoride (HF) electrochemical, 0-10 ppm	PNP-O
Hydrogen sulphide (H ₂ S) electrochemical, 0-50 ppm	PNP-L
Nitric oxide (NO) electrochemical, 0-100 ppm	PNP-E
Nitrogen dioxide (NO ₂) electrochemical, 0-5 ppm	PNP-D
Oxygen (O ₂) electrochemical, 0-25% volume	PNP-F
Ozone (O ₃) electrochemical, 0-1 ppm	PNP-G
Phosgene (COCl ₂) electrochemical, 0-1 ppm	PNP-U
Phosphine (PH ₃) electrochemical, 0-1 ppm	PNP-V
Silane (SiH ₄) electrochemical, 0-1 ppm	PNP-W
Sulphur dioxide (SO ₂) electrochemical, 0-20 ppm	PNP-P
TVOCs (PID), 0-2000 ppm	PNP-Y
TVOCs (PID), 0-20 ppm	PNP-Z

ACCESSORIES

Hard shell Pelican style transport case	6010.20
Handheld probe 10" with 30" of sample hose	YES-HHPROBE-10
YES Viewer information logging software CD	YES-SFTWRE
Calibration kit, c/w regulator, calibration adapter, fittings, carrying case	CAL-7150-CK1

