

ENGINE EXHAUST CONDENSATION PARTICLE COUNTER MODEL 3790A

The Engine Exhaust Condensation Particle Counter (EECPC) Model 3790A is a purpose-designed instrument for the measurement of solid particle number (PN) concentration of exhaust emissions. The 3790A has a 10-year proven track record for reliability and accurately measuring concentrations to meet the standards of the GRPE Particle Measurement Program (PMP), including Euro 5 Regulation 83 and Euro 6 Regulation 49, as well as Euro VI standards.




The Engine Exhaust Condensation Particle Counter (EECPC) Model 3790A is fully compliant for light-duty and heavy-duty vehicle certification in accordance with all Euro 5 Regulation 83 and Euro 6 Regulation 49 requirements. Built upon the proven rugged, reliable, and highly repeatable performance of the TSI 2nd generation CPC technology, the EECPC Model 3790A incorporates a wide assortment of design improvements and features such as anti-spill, anti-flooding design, condensate removal system, adjustable, internal calibration factor, removable saturator for ease of maintenance, built-in microprocessor with USB, RS-232 and Ethernet communication interfaces, touch-panel membrane keys and a display for setting-up instrument operating parameters, viewing particle number concentration and count data, interrogating instrument status, and data storage capabilities.

Features and Benefits

- + Meets the lower particle size detection limit at the defined D_{50} and D_{90} counting efficiencies
- + Achieves a linear response to particle concentration from 1 to 10,000 particles/cm³ with $R^2 \geq 0.97$
- + Achieves a counting accuracy of $\pm 10\%$ against a traceable standard
- + Operates under full flow conditions using single particle counting
- + Incorporates continuous, live-time coincidence correction for maximum accuracy
- + Calibrated in full compliance with proposed requirements
- + Achieves readability of 0.1 particles/cm³
- + Internal pulse height monitor to indicate measurement quality
- + 10 Hz data rate for model analysis



UNDERSTANDING, ACCELERATED

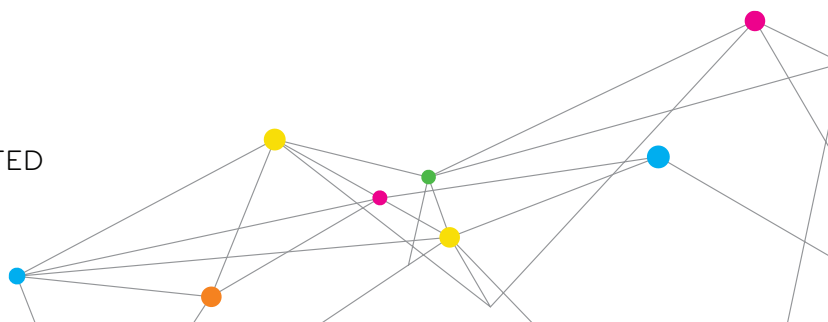

SPECIFICATIONS

ENGINE EXHAUST CONDENSATION PARTICLE COUNTER MODEL 3790A

Lower particle size detection characteristics

D ₅₀ efficiency	50% ± 12% at 23 nm
D ₉₀ efficiency	> 90% at 41 nm

Max. Detectable Particle

>3 µm

Particle Concentration Range

Single particle counting from 0 to 10,000 particles/cm³ with continuous, live-time coincidence correction

Concentration Accuracy

±10% compared to standard

Calibration Method

Calibrated against aerosol electrometer and electrostatically classified particles; Unit incorporates an adjustable, internal calibration factor

Concentration Linearity

Linear response from 1 to 10,000 particles/cm³ with correlation coefficient (R²) ≥ 0.97

Aerosol Sample

Flow Rate	1.0 L/min (0.035 cfm); NIST traceable
Flow Control	Volumetric flow using critical orifice; differential pressure across critical orifice is monitored; external vacuum required (not included)

Response Time

<5 sec for 95% response to concentration step change

Averaging Interval

1, 2, 3, 4, 5, 6, 10, 12, 15, 20, 30 or 60 seconds via front panel; more selections available using software

False Background Counts

<0.001 particle/cm³

Environmental Operating Conditions (ambient)

Temperature	10 to 35°C
Humidity	0 to 90% RH, non-condensing
Pressure	75 to 105 kPa (0.75 to 1.05 atm.)

Working Fluid

Reagent-grade n-butyl alcohol (not included)

Condensate Removal

All condensate is collected and removed automatically by a constant-flow-rate micropump

Communications

Protocol	Command set based on ASCII
Interfaces	
RS-232	9-pin, D-sub connector
USB	Type B connector, USB 2.0 compatible at 12 MB
Ethernet	8-wire RJ-45 jack, 10/100 BASE-T, TCP/IP

Input/Output

Analog Output	BNC connector, 0 to 10V proportional to concentration (configurable)
Pulse Output	BNC connector, TTL level pulse, 350 nanosec width (nominal)
Analog Input	Two BNC connectors, 0 to 10V for logging data from external sensors

Data Logging and Storage

SD/MMC flash memory card

Software

Supplied with Aerosol Instrument Manager® software, CPC module

Calibration Check

Recommended annually

Required Utilities

Power	100 to 240 VAC, 50/60 Hz, 200 W maximum
Vacuum Source	60 kPa (18 in. Hg) min. gauge

Front Panel Features

Aerosol sample inlet, particle and status indicator lights, 2-line LCD display, touch-panel membrane key buttons

Dimensions (L x W x H)

260 mm × 180 mm × 250 mm (10 in. × 7 in. × 10 in.)

Weight

5.5 kg (12 lbs)

Date Rate

10 Hz

Specifications are subject to change without notice.

Aerosol Instrument Manager, TSI and the TSI logo are registered trademarks of TSI Incorporated.

Microsoft and Windows are registered trademarks of Microsoft Corporation in the United States and/or other countries.



UNDERSTANDING, ACCELERATED

TSI Incorporated - Visit our website www.tsi.com for more information.

USA	Tel: +1 800 874 2811	India	Tel: +91 80 67877200
UK	Tel: +44 149 4 459200	China	Tel: +86 10 8219 7688
France	Tel: +33 1 41 19 21 99	Singapore	Tel: +65 6595 6388
Germany	Tel: +49 241 523030		

TO ORDER

Condensation Particle Counter

Specify	Description
3790A	Engine Exhaust Condensation Particle Counter with TSI Aerosol Instrument Manager software

Accessories

Specify	Description
3032	Vacuum Pump, 115 V
3032-1	Vacuum Pump, 230V/50Hz
3032-EC	Vacuum Pump, 230V (Europe only)
1031515	Maintenance Kit (includes 2 micropump filters, 3 butanol fill/drain filters, and 2 saturator wicks)
379020A	Rotating Disk Thermodiluter
379030	Thermal Conditioner Air Supply

Accessories must be ordered separately