

Overview



EchoMax XRS-5 ultrasonic transducer provides reliable, continuous level monitoring of liquids and slurries in narrow lift stations/wet wells, flumes, weirs and filter beds using a beam angle of just 10° and a CSM rubber face.

Benefits

- Narrow beam angle of only 10°
- Chemically resistant PVDF copolymer enclosure and CSM rubber face
- Measuring range: 8 m (26 ft) for measurement of liquids and slurries
- Fully submersible: IP68 degree of protection
- Easy installation with 1" NPT or R 1" BSPT connection

Application

The XRS-5 is non-contacting with a measuring range from 0.3 ... 8 m (1 ... 26 ft). Advanced echo processing ensures reliable data even in conditions with obstructions, turbulence, and foam.

The hermetically sealed CSM rubber face and the PVDF copolymer enclosure are designed for maximum resistance to methane, salt water, caustics, and harsh chemicals common to wastewater installations. With an IP68 degree of protection, this rugged sensor is fully submersible in the event of flood conditions. Use a submergence shield if full submergence is possible in the application. A submergence shield will maintain a high level reading output during submerged conditions.

The low-cost XRS-5 transducer is compatible with a full range of Siemens controllers, from a basic system for high/low alarm or simple pump control, up to advanced control systems with communications, telemetry and SCADA integration capabilities.

- Key Applications: wet wells, flumes, weirs, filter beds

Technical specifications

Mode of operation	
Measuring principle	Ultrasonic transducer
Input	
Measuring range	0.3 ... 8 m (1 ... 26 ft), dependent on application
Output	
Frequency	44 kHz
Beam angle	10°
Accuracy	
Temperature error	Compensated by integral temperature sensor
Rated operating conditions	
Vessel pressure	Normal atmospheric pressure
Ambient conditions	
• Ambient temperature	-20 ... +65 °C (-4 ... +149 ° F)
Design	
Weight (approximate shipping weight of sensor with standard cable length)	1.2 kg (2.6 lb)
Material (enclosure)	PVDF copolymer enclosure and CSM face
Process connection	1" NPT [(Taper), ANSI/ASME B1.20.1] or R 1" [(BSPT), EN 10226]
Degree of protection	IP65/IP68
Cable connection	2-core shielded/twisted, 0.5 mm ² (20 AWG), PVC sheath
Cable (max. length)	<ul style="list-style-type: none"> • 365 m (1 200 ft) with RG 62 A/U coaxial cable • 365 m (1 200 ft) with 2-core twisted pair, foil shield, 0.5 mm² (20 AWG), PVC sheath, only for MultiRanger 100/200
Options	
Flange version	Factory flange with PTFE face for ASME, EN or JIS configuration
Submergence shield	For applications with flooding possible
Certificates and approvals	
CE, RCM, KCC	
CSA Class I, Div. 2, Groups A, B, C, D, Class II, Div. 1, Groups E, F, G	
FM Class I, Zone 1, AEx m IIC, T6 Class II, III, Div. 1, Groups E, F, G T6	
ATEX II 2GD / IECEx / INMETRO Ex mb IIC T6 Gb, Ex tb IIIC T85 °C Db	

Level Measurement

Continuous level measurement - Ultrasonic transducers

EchoMax XRS-5

Selection and Ordering data

EchoMax XRS-5 transducer

With a beam angle of 10°, the XRS-5 provides reliable, continuous level monitoring of liquids and slurries in narrow lift stations/wet wells, flumes, weirs and filter beds.

Measuring range: min. 0.3 m (1 ft), max. 8 m (26 ft)

➤ Click on the Article No. for the online configuration in the PIA Life Cycle Portal.

Process connection

1" NPT [(Taper), ANSI/ASME B1.20.1]

R 1" [(BSPT), EN 10226]

Cable length

5 m (16.40 ft)

10 m (32.81 ft)

30 m (98.43 ft)

Facing

Standard (CSM rubber)

PTFE (flange versions)

Approvals

CE, RCM, KCC, CSA Class I, Div. 2, Groups A, B, C, D, Class II, Div. 1, Groups E, F, G FM Class I, Zone 1, AEx m IIC, T6 Class II, III, Div. 1, Groups E, F, G T6 ATEX II 2GD / IECEx / INMETRO Ex mb IIC T6 Gb, Ex tb IIC T85 °C Db

Mounting flange (flush mount)

None

3" ASME, 150 lb, flat faced

4" ASME, 150 lb, flat faced

6" ASME, 150 lb, flat faced

DN 80, PN 10/16, Type A, flat faced

DN 100, PN 10/16, Type A, flat faced

DN 150, PN 10/16, Type A, flat faced

JIS10K 3B style

JIS10K 4B style

JIS10K 6B style

Note: flange bolting patterns and facings

dimensionally correspond to the applicable

ASME B16.5 or EN 1092-1, or JIS B 2220 standard.

Operating Instructions

Quick Start Manual, multi-language

Applications Guidelines, multi-language

Note: The Operating Instructions should be ordered as a separate line item on the order.

All literature is available to download for free, in a range of languages, at <http://www.siemens.com/processinstrumentation/documentation>

This device is shipped with the Siemens Level and Weighing manual DVD containing the ATEX Quick Start and Operating Instructions library.

◆ We can offer shorter delivery times for configurations designated with the Quick Ship Symbol ◆. For details see page 9/5 in the appendix.

Article No.

7ML1106-

0 - 0

◆ 1

◆ 2

◆ A

◆ B

◆ C

◆ A

◆ B

◆ 2

◆ A

◆ B

◆ C

◆ D

◆ J

◆ K

◆ L

◆ Q

◆ R

◆ S

Article No.

A5E32299685

7ML1998-5HV61

Selection and Ordering data

Further designs

Please add "-Z" to Article No. and specify Order code(s).

Acrylic coated, stainless steel tag [13 x 45 mm (0.5 x 1.75 inch)]: Measuring-point number/identification (max. 16 characters) specify in plain text

Accessories

Tag, stainless steel with hole, 12 x 45 mm (0.47 x 1.77 inch), one text line for fastening on sensors

Submergence shield kit

Easy Aimer 2, aluminum, NPT with 3/4" x 1" PVC coupling

Easy Aimer 2, aluminum with M20 adapter and 1" and 1 1/2" BSPT aluminum couplings

Easy Aimer 304, NPT with 1" stainless steel coupling

Easy Aimer 304, with M20 adapter and 1" and 1 1/2" BSPT 304 stainless steel couplings

FMS-200 universal box bracket, mounting kit

FMS-210 channel bracket, wall mount

FMS-220 extended channel bracket, wall mount

FMS-310 channel bracket, floor mount

FMS-320 extended channel bracket, floor mount

FMS-350 bridge channel bracket, floor mount (see Mounting Brackets on page 4/190 for more information)

1" NPT locknut, plastic

1" BSPT locknut, plastic

◆ We can offer shorter delivery times for configurations designated with the Quick Ship Symbol ◆. For details see page 9/5 in the appendix.

Order code

◆ Y17

Article No.

7ML1930-1BJ

7ML1830-1BH

7ML1830-1AQ

7ML1830-1AX

7ML1830-1AU

7ML1830-1GN

7ML1830-1BK

7ML1830-1BL

7ML1830-1BM

7ML1830-1BN

7ML1830-1BP

7ML1830-1BQ

7ML1830-1DS

7ML1830-1DR

Selection and Ordering data	Article No.
<p>EchoMax XRS-5C transducer</p> <p>With a beam angle of 10°, the XRS-5 provides reliable, continuous level monitoring of liquids and slurries in narrow lift stations/wet wells, flumes, weirs and filter beds. Measuring range: min. 0.3 m (1 ft), max. 8 m (26 ft)</p> <p>➤ Click on the Article No. for the online configuration in the PIA Life Cycle Portal.</p>	<p>7ML1105-</p> <p>1 - 0</p>
<p>Process connection</p> <p>1" NPT [(Taper), ANSI/ASME B1.20.1]</p>	<p>1</p>
<p>Cable length</p> <p>5 m (16.40 ft)</p> <p>10 m (32.81 ft)</p> <p>30 m (98.43 ft)</p>	<p>A</p> <p>B</p> <p>C</p>
<p>Facing</p> <p>Standard (CSM rubber)</p> <p>PTFE (flange versions)</p>	<p>A</p> <p>B</p>
<p>Approvals</p> <p>CSA Class I Div. 1, Groups A, B, C, D; Class II Div. 1, Groups E, F, G; Class III</p>	<p>1</p>
<p>Mounting flange (flush mount)</p> <p>None</p> <p>3" ASME, 150 lb, flat faced</p> <p>4" ASME, 150 lb, flat faced</p> <p>6" ASME, 150 lb, flat faced</p> <p>Note: flange bolting patterns and facings dimensionally correspond to the applicable ASME B16.5 or EN 1092-1, or JIS B 2220 standard.</p>	<p>A</p> <p>B</p> <p>C</p> <p>D</p>
<p>Operating Instructions</p> <p>Quick Start Manual, multi-language</p> <p>Applications Guidelines, multi-language</p> <p>Note: The Operating Instructions should be ordered as a separate line item on the order.</p> <p>All literature is available to download for free, in a range of languages, at http://www.siemens.com/processinstrumentation/documentation</p> <p>This device is shipped with the Siemens Level and Weighing manual DVD containing the ATEX Quick Start and Operating Instructions library.</p> <p>➤ We can offer shorter delivery times for configurations designated with the Quick Ship Symbol ⚡. For details see page 9/5 in the appendix.</p>	<p>Article No.</p> <p>A5E32299685</p> <p>7ML1998-5HV61</p>

Selection and Ordering data	Order code
<p>Further designs</p> <p>Please add "-Z" to Article No. and specify Order code(s).</p>	
<p>Acrylic coated, stainless steel tag [13 x 45 mm (0.5 x 1.75 inch)]: Measuring-point number/identification (max. 16 characters) specify in plain text</p>	<p>Y17</p>
<p>Accessories</p> <p>Submergence shield kit</p> <p>Easy Aimer 2, aluminum, NPT with ¾" x 1" PVC coupling</p> <p>Easy Aimer 304, NPT with 1" stainless steel coupling</p> <p>FMS-200 universal box bracket, mounting kit</p> <p>FMS-210 channel bracket, wall mount</p> <p>FMS-220 extended channel bracket, wall mount</p> <p>FMS-310 channel bracket, floor mount</p> <p>FMS-320 extended channel bracket, floor mount</p> <p>FMS-350 bridge channel bracket, floor mount (see Mounting Brackets on page 4/190 for more information)</p> <p>➤ We can offer shorter delivery times for configurations designated with the Quick Ship Symbol ⚡. For details see page 9/5 in the appendix.</p>	<p>Article No.</p> <p>7ML1830-1BH</p> <p>7ML1830-1AQ</p> <p>7ML1830-1AU</p> <p>7ML1830-1BK</p> <p>7ML1830-1BL</p> <p>7ML1830-1BM</p> <p>7ML1830-1BN</p> <p>7ML1830-1BP</p> <p>7ML1830-1BQ</p>




Level Measurement

Continuous level measurement - Ultrasonic transducers


EchoMax XRS-5

Dimensional drawings

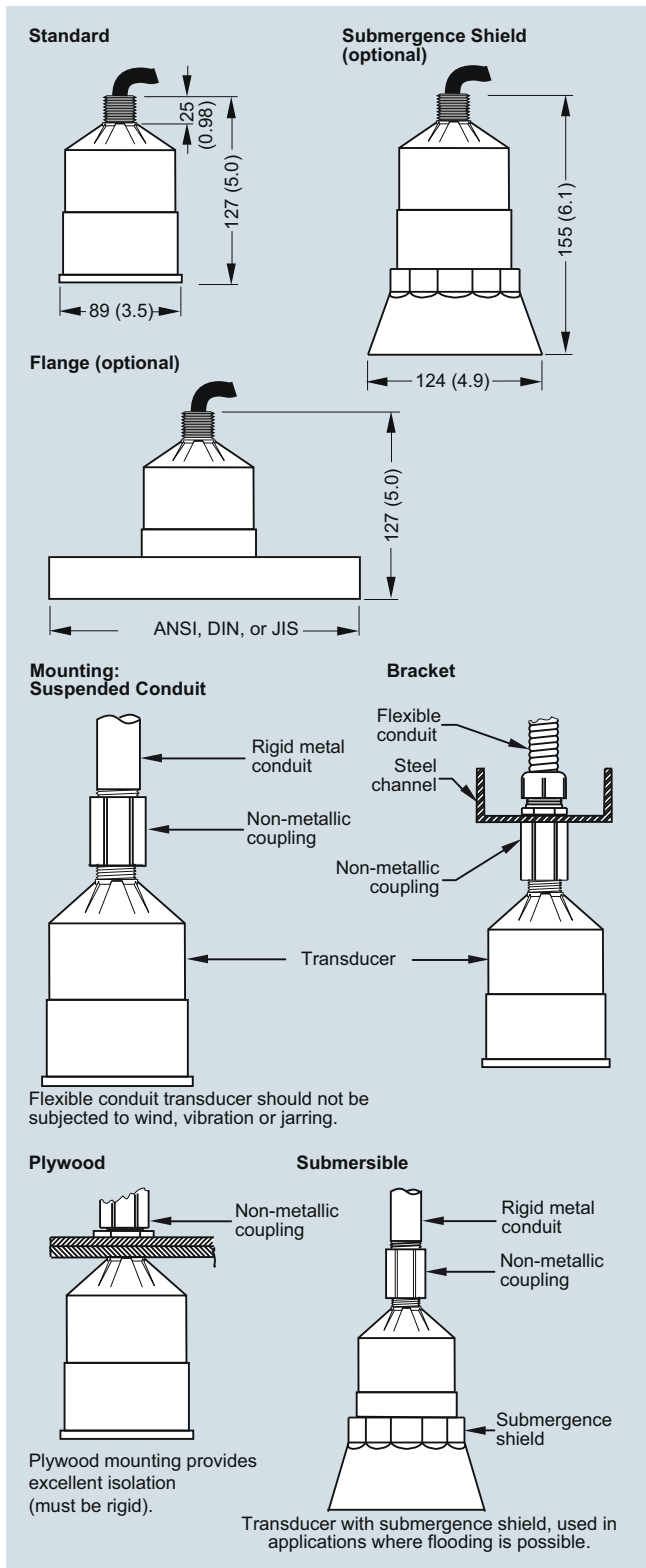

XRS-5 ultrasonic transducer, dimensions in mm (inch)

Schematics

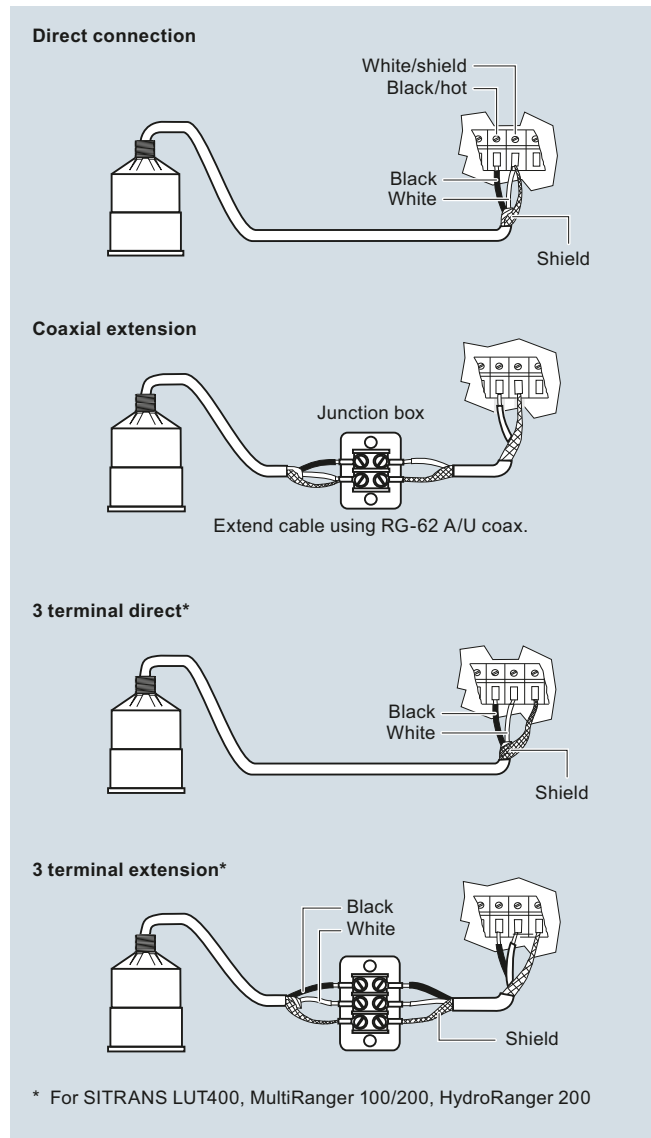

XRS-5 ultrasonic transducer connections

4