

# DILUTION SYSTEM

## MODEL 3332

APPLICATION NOTE 3332-001


### Dilution System for 1 Liter Per Minute Flows

The main application of the Model 3332 Dilution System is in the dilution of test aerosols for the Model 3330 Optical Particle Sizer. Other applications having a 1 liter per minute flow rate can also use the Model 3332 Particle Diluter.

The diluter is available in two models with different dilution factors.

	Volume Flow	Dilution Factor
3332-100	1.0 L/min	100
3332-10	1.0 L/min	10

Schematic of the  
Model 3332  
Dilution System

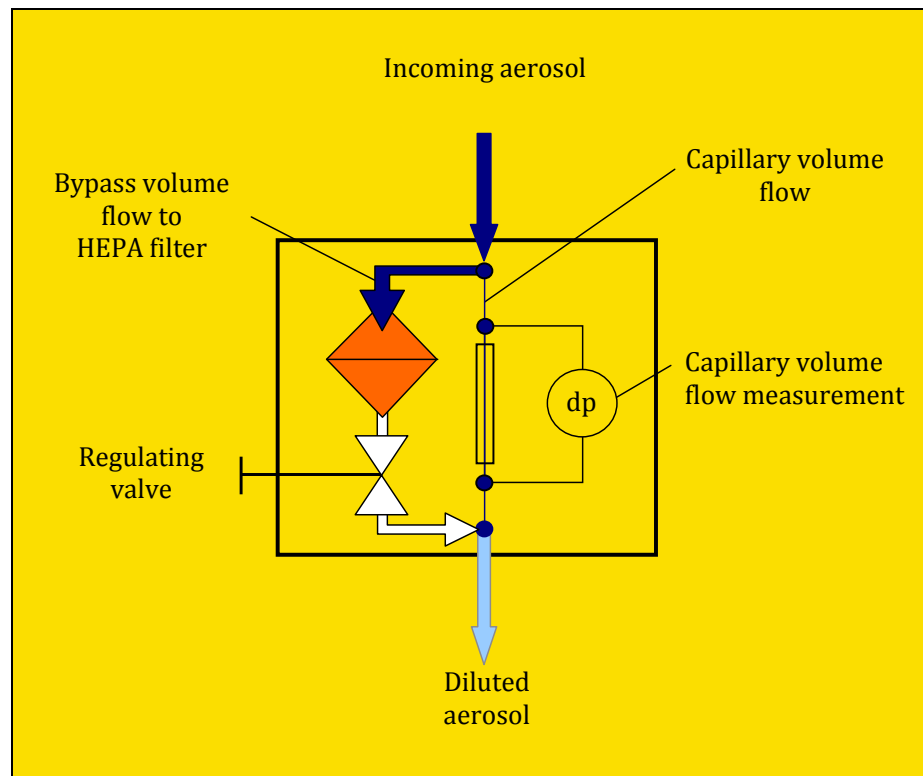



**Model 3332 Dilution System**

The indicator lights on the diluter indicate if the pressure drop across the capillary is what it should be (based on its calibration). If one of the red arrows is illuminated, an adjustment of the knob will restore the proper balance between the flows.

<b>Power Supply</b>	9 ... 15 VDC (AC adapter, battery operation)
<b>Dimensions</b>	160 mm x 300 mm x 110 mm (6.3 in. x 11.8 in. x 4.3 in)



UNDERSTANDING, ACCELERATED

TSI Incorporated – Visit our website [www.tsi.com](http://www.tsi.com) for more information.

USA Tel: +1 800 874 2811  
 UK Tel: +44 149 4 459200  
 France Tel: +33 4 91 11 87 64  
 Germany Tel: +49 241 523030

India Tel: +91 80 67877200  
 China Tel: +86 10 8219 7688  
 Singapore Tel: +65 6595 6388



Distributed by:  
 Kenelec Scientific Pty Ltd  
 1300 73 22 33  
 sales@kenelec.com.au  
 www.kenelec.com.au