

AEROSOL HUMIDITY & TEMPERATURE SENSOR MODEL RHT3000

RECORD AEROSOL HUMIDITY & TEMPERATURE TOGETHER WITH YOUR PARTICLE COUNT & SIZE

Humidity and temperature affect aerosol processes and properties. This sensor was designed to measure both parameters in an aerosol flow to your TSI CPCs or Classifier of the newest generation. When connected with a USB cable to the CPC, the data is automatically recognized and aerosol humidity and temperature is recorded in the CPC. The TSI Classifier model 3082 also detects the sensor and the newest Aerosol Instrument Manager for SMPS is recording data along with the particle size distribution.



Features and Benefits


- + Easy to integrate into aerosol flows with two removable inlet and outlets ($\frac{1}{4}$ "
- + Communicates with newest TSI CPC and Classifier models; simple programming interface for 3rd party software integration
- + Powered thru USB port
- + Helps to ensure data quality

Applications

- + Air quality monitoring of ultrafine particles
- + Environmental chamber studies
- + Indoor air quality studies
- + Health effect studies
- + Basic aerosol research



UNDERSTANDING, ACCELERATED

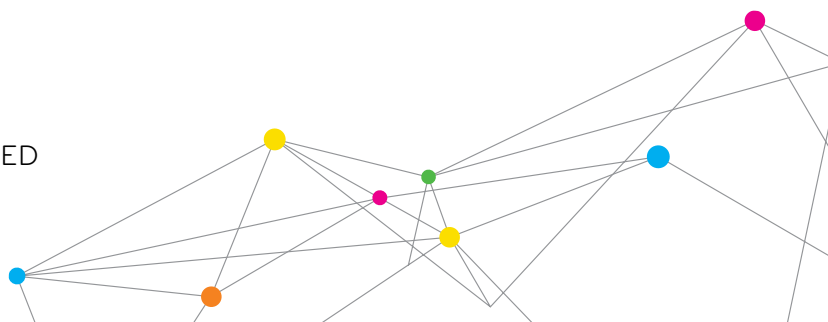

SPECIFICATIONS

AEROSOL HUMIDITY AND TEMPERATURE SENSOR RHT3000

Specifications

Temperature	10°C to 35°C
Relative Humidity	0% to 90% noncondensing
Temperature Accuracy	± 0.3 °C
Humidity Accuracy	± 2% as specified by the measurement component manufacturer
Compliance	IEC 61326 & IEC 61010-1
Further technical information is available in the user guide.	

Data Acquisition

When connected via USB to a compatible TSI CPC (375x, 3789), the CPC will automatically capture the data.

When connected via USB to a compatible TSI SMPS, Aerosol Instrument Manager software (v 11) can be used to log data along with the particle size distribution. Always download the newest software version.

When a USB connection is established, 3rd party software can communicate with the device via simple text commands.

Communication

USB type-C connecting to CPC, Classifier, or PC

Power Requirements

5 Volts DC; 2.5 W

Dimensions (HxWxD/Weight)

8.4 x 5.1 x 2.5 cm, 0.45 kg
3.3 x 2 x 1 in, 1 lbs.

Specifications reflect typical performance and are subject to change without notice.

Aerosol Instrument Manager, TSI and the TSI logo are registered trademarks, and Scanning Mobility Particle Sizer and SMPS are trademarks of TSI Incorporated.



UNDERSTANDING, ACCELERATED

TSI Incorporated - Visit our website www.tsi.com for more information.

USA	Tel: +1 800 874 2811	India	Tel: +91 80 67877200
UK	Tel: +44 149 4 459200	China	Tel: +86 10 8219 7688
France	Tel: +33 1 41 19 21 99	Singapore	Tel: +65 6595 6388
Germany	Tel: +49 241 523030		



Distributed by:
Kenelec Scientific Pty Ltd
1300 73 22 33
sales@kenelec.com.au
www.kenelec.com.au