



Designed for use in publicly occupied and frequented spaces. Ideal for use where integrated demand controlled ventilation (DCV) is used to regulate a comfortable working environment, maintain air quality and promote energy savings. The low profile, aesthetically pleasing enclosure is designed to reduce the noticeability of the device by the public eye.

Both the analog and digital models are powered by 24 VDC or ground referenced AC, come with an LCD display, temperature compensation and thermal resetting fuse. Sensor replacement is easy with true Plug & Play smart sensors that arrive pre-calibrated. The firmware and configuration can be upgraded in the field using the USB connection.

The digital models are user configurable in the field for BACnet® MS-TP RS-485 or Modbus® RTU RS-485 output for communicating with a controller, Building Automation System or other control panel.


### KEY FEATURES

- » One 4-20 mA analog output, or user configurable Modbus® RS-485 RTU or BACnet® MS/ TP communication protocols for communication with a Controller or Building Automation System (BAS)
- » Easy Plug & Play Smart Sensor replacement at end of life
- » Pre-calibrated replacement sensors
- » LCD display
- » Option -RLY\*: One SPDT dry contact relay, rated 30 volts, 2 amps max
- » Option -RHT\*: Relative Humidity & Temperature sensor
- » Models available with user selectable PM1, PM2.5 or PM10 particulate sensor
- » Low profile to reduce noticeability in public spaces
- » USB port for configuration changes and firmware upgrades
- » RoHS compliant circuit board

### APPLICATIONS

- » Hotels
- » Office Buildings
- » Hospitals
- » Apartment Buildings
- » Retirement Homes
- » Theaters / Auditoriums
- » Schools / Universities, Dormitories
- » ... and many more

### TECHNICAL DRAWING

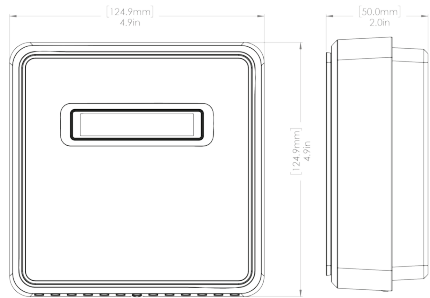

### TECHNICAL SPECIFICATIONS

#### MECHANICAL

Enclosure	Polycarbonate, white, low profile
Weight	400 g / 14 oz
Size	124.9 x 124.9 x 50.0 mm 4.9 x 4.9 x 2.0 inches

#### USER INTERFACE

Display	2-line by 16 character graphic LCD
Push Buttons	Initiate calibration and menu options with internal UP, DOWN and ENTER push buttons
USB Port	Internal port for USB memory stick for field configuration updated / firmware upgrades
Audible Alarm	none

#### INPUT / OUTPUT

Digital Output (CGAS-DP models)	BACnet MS/TP (version 1 rev 14) RS-485 or Modbus RTU (version 1.1b3) RS-485 (user configurable in the field)
Analog Output (CGAS-AP models)	One 4-20 mA output used for gas reading
Relay (Option -RLY*)	One SPDT dry contact, rated 30 volts, 2 amps max
RH and Temperature (Option -RHT*)	User selectable DegC or DegF (analog models current output is for gas reading)

#### ELECTRICAL

Power Requirement	16-30 VDC, 3W, Class 2 12-27 VAC, 50-60 Hz, 3 VA, Class 2 24V recommended
Digital Wiring	VDC or VAC (ground referenced) 4-conductor shielded, 16 AWG stranded within conduit, network wiring (daisy-chain)
Analog Wiring	VAC (ground referenced) 3-conductor shielded 18 AWG (or larger) stranded
Fuse(s)	Automatic resetting thermal



# ANALOG OR DIGITAL GAS DETECTORS DATASHEET

## CGAS DETECTOR for Indoor Public Spaces

FIXED SYSTEMS

### TECHNICAL SPECIFICATIONS

#### ENVIRONMENTAL

Operating Temperature	0°C to 40°C (32°F to 104°F)
Operating Humidity	15 - 90% RH non-condensing

#### CERTIFICATION

Conforms to: CSA-C22.2 No. 205-12, UL508 (Edition 18):2018
Conforms to: EMC Directive 2014/30/EU EN 50270:2015, Type 1, EN61010
Conforms to: FCC. This device complies with Part 15 of the FCC Rules.
Listed by BTL

### PRODUCT CODES

#### Single Channel Analog Models - 4 - 20 mA Output Lifespan

CGAS-AP-CO2-2K	Internal Infrared Carbon Dioxide sensor (0 - 2,000 ppm)	~8yr
CGAS-AP-CO2-5K	Internal Infrared Carbon Dioxide sensor (0 - 5,000 ppm)	~8yr
CGAS-AP-CO2-5%	Internal infrared Carbon Dioxide sensor (0 - 5% vol)	~8yr
CGAS-AP-CO <sup>1</sup>	Internal electrochemical Carbon Monoxide sensor (0 - 200 ppm)	~6yr
CGAS-AP-CH2O	Internal electrochemical Formaldehyde sensor (0 - 5 ppm)	~2yr
CGAS-AP-CCH4-100	Methane (CH <sub>4</sub> ) sensor (0 - 100 %LEL)	~5yr
CGAS-AP-PM	Internal, user selectable PM1, PM2.5 (default) or PM10 Particulate sensor	~5yr
CGAS-AP-SPL	Internal PID TVOC sensor (0 - 30 ppm)	~5yr
CGAS-AP-SPH	Internal PID TVOC sensor (0 - 300 ppm)	~5yr
CGAS-AP-STVOC	Internal solid state TVOC sensor (0 - 500 ppm)	~5yr

#### Single Channel Digital Models - Modbus® / BACnet® Output

CGAS-DP-CO2-2K	Internal Carbon Dioxide sensor (0 - 2,000 ppm)	~8yr
CGAS-DP-CO2-5K	Internal Carbon Dioxide sensor (0 - 5,000 ppm)	~8yr
CGAS-DP-CO2-5%	Internal Infrared Carbon Dioxide sensor (0 - 5% vol)	~8yr
CGAS-DP-CO <sup>1</sup>	Internal electrochemical Carbon Monoxide sensor (0 - 200 ppm)	~6yr
CGAS-DP-CH2O	Internal electrochemical Formaldehyde sensor (0 - 5 ppm)	~2yr
CGAS-DP-CCH4-100	Methane (CH <sub>4</sub> ) sensor (0 - 100 %LEL)	~5yr
CGAS-DP-PM	Internal, user selectable PM1, PM2.5 (default) or PM10 Particulate sensor	~5yr
CGAS-DP-SPL	Internal PID TVOC sensor (0 - 30 ppm)	~5yr
CGAS-DP-SPH	Internal PID TVOC sensor (0 - 300 ppm)	~5yr
CGAS-DP-STVOC	Internal solid state TVOC sensor (0 - 500 ppm)	~5yr

### PRODUCT CODES

#### Dual Channel Digital Models - Modbus® / BACnet® Output

CGAS-DP-CO-CO2-2K <sup>1</sup>	Internal Carbon Monoxide sensor and (0 - 200 ppm) Carbon Dioxide sensor (0 - 2,000 ppm)	~6yr ~8yr
CGAS-DP-CO-CO2-5K <sup>1</sup>	Internal Carbon Monoxide sensor and (0 - 200 ppm) Carbon Dioxide sensor (0 - 5,000 ppm)	~6yr ~8yr
CGAS-DP-CO-CO2-5% <sup>1</sup>	Internal Carbon Monoxide sensor and (0 - 200 ppm) Carbon Dioxide sensor (0 - 5% vol)	~6yr ~8yr
CGAS-DP-CO2-2K-PM	Internal Carbon Dioxide sensor (0 - 2,000 ppm) and user selectable PM1, PM2.5 (default) or PM10 Particulate sensor	~8yr
CGAS-DP-CO2-5K-PM	Internal Carbon Dioxide sensor (0 - 5,000 ppm) and user selectable PM1, PM2.5 (default) or PM10 Particulate sensor	~8yr
CGAS-DP-CO2-5%-PM	Internal Carbon Dioxide sensor (0 - 5% vol) and user selectable PM1, PM2.5 (default) or PM10 Particulate sensor	~8yr
CGAS-DP-CO-PM <sup>1</sup>	Internal Carbon Monoxide sensor (0 - 200 ppm) and user selectable PM1, PM2.5 (default) or PM10 Particulate sensor	~6yr

#### OPTIONS (Factory installed)

RHT*	RH & Temperature sensor (°C or °F)
RLY*	1 SPDT dry contact relay, rated 30 volts, 2 amps max

#### \*IMPORTANT NOTES ON OPTIONS:

-RHT is available with ALL models. Analog models will output signal for gas reading. UL2075 approved CO sensor is not available with RH & Temperature sensor.

-RLY is not available with dual channel models

-RHT-RLY is only available with single channel CO or CO<sub>2</sub> models.

<sup>1</sup>CO sensor is UL2075 Approved in these models



Modbus® is a registered trademark of Gould Inc. Corporation. BACnet® is a registered trademark of American Society of Heating, Refrigerating and Air-Conditioning Engineers (ASHRAE)

© 2022 Critical Environment Technologies Canada Inc. | Data subject to change without notice. | Toll Free: +1.877.940.8741 | www.critical-environment.com | 0401



Distributed by: Kenelec Scientific Pty Ltd | 1300 73 22 33 | sales@kenelec.com.au | www.kenelec.com.au