



® Knowledge Beyond Measure.

P-Trak® Ultrafine Particle Counter

Model 8525



The TSI's P-Trak® Ultrafine Particle Counter (UPC) 8525 is an ideal instrument for measuring workplace ultrafine particulate levels, as well as helping eliminate indoor air quality (IAQ) problems.

This portable instrument detects and counts ultrafine particles (smaller than one micrometer) that often accompany or signal the presence of a pollutant that is the root cause of complaints.

Ultrafine particles are defined as having a diameter less than 0.1 μm (or 100 nm). Engineered nanoparticles (nanomaterials) are a subset of ultrafine particles with dimensions from 1 to 100 nm. Nanomaterials are produced and used for industrial and high-tech applications, while ultrafine particles are the byproducts of combustion and other chemical reactions. Unfortunately, the occupational health risks associated with manufacturing and using nanomaterials are not clearly understood. As a result, a need has arisen to assess workplace conditions. Using TSI's proven technology, the P-Trak® gives direct, real-time measurement of workplace ultrafine particulate levels.

The P-Trak UPC also locates obvious pollutant sources such as boilers, furnaces, and vehicles, and it also detects the not-so-obvious sources such as photocopy machines and printers. Use this instrument to detect the migration of toxic exhaust aerosols, malfunctioning office equipment, pinhole gasket leaks in boilers and a wide variety of other problems.

Applications

- Check office equipment
- Clean room containment checks
- Filter checks
- Check fume hoods
- Check safety cabinets
- Vehicle emission migration
- Combustion leaks
- Control smoking areas

Features and Benefits

- Real-time ultrafine particle counter
- Solves tough IAQ problems
- Easy to use
- Data log information



Specifications

P-Trak® Ultrafine Particle Counter

Models 8525

Concentration Range

0 to 5×10^5 particles/cm³

Particle Size Range

0.02 to 1 micrometer

Temperature Range

Operation 32 to 100°F (0 to 38°C)
Storage -40 to 160°F (-40 to 70°C)

Flow Rate

Sample 100 cm³/min
Total 700 cm³/min (nominal)

Power Requirement

Battery type 6 AA alkaline
Battery life 6 hrs at 70°F (21°C)

Alcohol Requirement

Type 100% reagent grade isopropyl
Hours per charge 8 hours at 70°F (21°C)

RS232 Output


Baud rate 9600

Memory

Single points 470
Data logging 1,000 hours at one-minute intervals.
A maximum of 141 separate tests.¹

Size (H x W x D)

10.75 in. x 5.5 in. x 5.5 in. (27 cm x 14 cm x 14 cm)

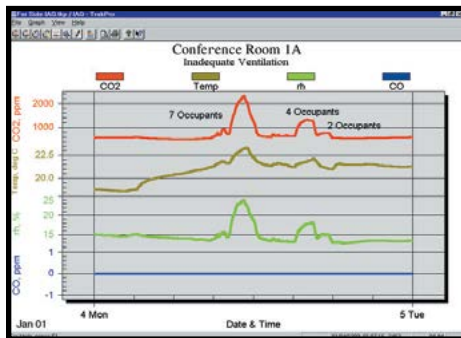

Easy-to-use TrakPro™ Data Analysis Software stores, organizes and reports test results.

Weight

Instrument with batteries 3.8 lbs (1.7 kg)
Factory Recalibration Interval One year

Warranty

Two years on parts and labor²

Computer Requirements

PC with Microsoft Windows® 2000 or XP; Windows-compatible printer; 5 MB hard disk space; and available RS232 serial port (for downloading).



P-Trak® Ultrafine Particle Counter and accessories includes: Telescoping Sample Probe, Inlet Screen, Spare Wicks (2), Alkaline Batteries, Alcohol Fill Capsule with Storage Cap, Reagent Grade Isopropyl Alcohol, Zero Filters (2), Carrying Case, TrakPro™ Software, Computer Cable, Operation and Service Manual, Calibration Certificate, and Two-year Warranty.

¹ The P-Trak® will operate with an AC adapter for long periods but the alcohol wick must be resaturated every 8 hours when operating over an extended time.

² Warranty repairs returned via overnight carrier at TSI expense.

Specifications are subject to change without notice.

P-Trak, TSI and the TSI logo are registered trademarks in the United States and may be protected under other country's trademark registrations.

Microsoft and Windows are registered trademarks of Microsoft Corporation in the United States and/or other countries.



Knowledge Beyond Measure.

TSI Incorporated - Visit our website www.tsi.com for more information.

USA Tel: +1 800 874 2811
UK Tel: +44 149 4 459200
France Tel: +33 1 41 19 21 99
Germany Tel: +49 241 523030

India Tel: +91 80 67877200
China Tel: +86 10 8219 7688
Singapore Tel: +65 6595 6388



Distributed by:

Kenelec Scientific Pty Ltd
1300 73 22 33
sales@kenelec.com.au
www.kenelec.com.au