

Indigo520 Transmitter For Vaisala Indigo-compatible probes



Features

- Supports 2 detachable measurement devices simultaneously
- Data logging of all measurement parameters
- IP66 rated metal enclosure
- 4 configurable galvanically isolated analog outputs
- 2-wire current loop analog input
- 2 relays
- Ethernet connection with web interface and optional Vaisala cloud connectivity for remote monitoring
- Displays measurements on the spot and transmits them to automation systems through analog signals, relays, or Modbus TCP/IP protocol

Vaisala Indigo520 Transmitter is an industrial-grade, robust transmitter that accommodates 1 or 2 Vaisala Indigo-compatible probes for humidity, temperature, dew point, carbon dioxide, hydrogen peroxide, and moisture in oil measurements. The transmitter can measure barometric pressure with an additional module.

Options

- Multiple powering options: Power over Ethernet, protective extra-low voltage, and AC (mains) power
- Available with Vaisala BAROCAP® barometric pressure sensor known for its high accuracy and excellent long-term stability
- Optional non-display model with LED indicator

Variety of probe options

The Indigo500 series transmitters are the most versatile option for use with Indigo-compatible probes.

- HMP series humidity and temperature probes
- DMP series dew point probes
- GMP250 series carbon dioxide probes

- HPP270 series vaporized hydrogen peroxide probes
- MMP8 moisture in oil probe

The probes are interchangeable, self-contained measurement instruments that are easily detachable from the transmitter for calibration and maintenance. The probes are connected using a cable that can be extended with a standard instrumentation cable to allow up to 30 m (98 ft) distance between the transmitter and the probe.

The Indigo500 series transmitters can be connected to the MHT410 transmitter for display of measurement data and automation system connectivity. Through the transmitter service port, the Indigo500 series transmitters can also be connected to the free Vaisala Insight PC Software or Indigo80 Handheld Indicator.

The Indigo520 transmitter can be connected to Polaris™ PR53 Process Refractometers for measuring liquid concentrations.

For more information on the Indigo product family, see vaisala.com/indigo.

Analog and digital interfaces

The Indigo520 transmitter has 4 analog channels that can be configured to mA or voltage type, and 2 configurable relays. Any of the output parameters from the connected probes can be assigned to control the analog channels and relays.

The digital output protocol is Modbus TCP/IP over Ethernet. The Ethernet connection also provides a web interface and cybersecurity that meets modern standards. The Indigo500 series transmitters can be ordered with a possibility for Vaisala cloud connection for remote monitoring.

Technical data

Indigo-compatible probes

| Measurement type | Probe models |
|-----------------------------|--|
| Humidity and temperature | HMP1, HMP3, HMP4, HMP5, HMP7, HMP8, HMP9 |
| Temperature | TMP1 |
| Dew point | DMP1, DMP5, DMP6, DMP7, DMP8 |
| Carbon dioxide | GMP251, GMP252 |
| Vaporized hydrogen peroxide | HPP271, HPP272 |
| Moisture in oil | MMP8 |

Other compatible devices

| Device or series | Models |
|---|--|
| Moisture, Hydrogen and Temperature Transmitter MHT410 | MHT410 |
| Polaris™ Process Refractometers ¹⁾ | PR53AC, PR53AP, PR53GC, PR53GP, PR53M, PR53SD, PR53W |
| Indigo80 Handheld Indicator | Indigo80 |
| MGP241 Multigas Probe | MGP241 |
| MGP260 Series Multigas Probes | MGP261, MGP262 |
| Differential Pressure Transmitters ²⁾ | PDT101, PDT102 |

¹⁾ Compatible with transmitters ordered with software configuration "L" for process refractometers.

²⁾ PDT101 and PDT102 can be used through analog input.

Transmitter options

| | |
|----------|--|
| Display | <ul style="list-style-type: none">Capacitive touchscreen displayNo display (indicator LED) ¹⁾ |
| Powering | <ul style="list-style-type: none">Protective extra-low voltage (15–35 V DC, 24 V AC ± 20%)AC (mains) power (100–240 V AC 50/60 Hz)Power over Ethernet (no analog outputs, analog input, or relays) |

¹⁾ Recommended when the transmitter is exposed to direct UV light, and for outdoor installations and high-humidity environments.

Measurement performance

| Barometric pressure (optional module) | |
|---|---|
| Pressure range | 500–1100 hPa |
| Class A: | |
| Linearity | ±0.05 hPa |
| Hysteresis | ±0.03 hPa |
| Repeatability | ±0.03 hPa |
| Calibration uncertainty | ±0.07 hPa |
| Accuracy at +20 °C / +68 °F | ±0.10 hPa |
| Temperature dependence | ±0.1 hPa |
| Total accuracy (-40 ... +60 °C / -40 ... +140 °F) | ±0.15 hPa |
| Long-term stability/year | ±0.1 hPa |
| Response time (100 % response): | |
| One sensor | 2 s |
| Pressure units | hPa, mbar, kPa, Pa, inHg, mmH2O, mmHg, torr, psia |

Mechanical specifications

| | |
|---|---|
| Housing classification | IK08, DIN EN ISO 11997-1: Cycle B (VDA 621-415) |
| Housing material | AlSi10Mg (DIN 1725) |
| Display window material | Strengthened glass (IK08) |
| Weight | 1.5 kg (3.3 lb) |
| Dimensions (H × W × D) | 142 × 182 × 67 mm (5.63 × 7.17 × 2.64 in) |
| Cable diameters for cable glands | |
| M20×1.5 glands | 5.0–9.0 mm (0.20–0.35 in) |
| M20×1.5 glands with split bushing | 7 mm (0.28 in) |
| M16×1.5 glands | 2.0–6.0 mm (0.08–0.24 in) |

Operating environment

| | |
|---|---------------------------|
| Operating environment | Outdoor use |
| Use in wet location | Yes |
| Operating humidity | 0–100 %RH |
| Maximum operating altitude, AC (mains) power | 3000 m (approx. 9800 ft) |
| Maximum operating altitude, protective extra-low voltage (PELV) and Power over Ethernet (PoE) | 4000 m (approx. 13100 ft) |
| IP rating | IP66 ¹⁾ |
| UL 50E rating | Type 4 |

Operating temperature

| | |
|---------------------------------------|----------------------------------|
| With display | -20 ... +55 °C (-4 ... +131 °F) |
| Without display | -40 ... +60 °C (-40 ... +140 °F) |
| Without display with barometer module | -40 ... +55 °C (-40 ... +131 °F) |
| Storage temperature | |
| With display | -30 ... +60 °C (-22 ... +140 °F) |
| Without display | -40 ... +60 °C (-40 ... +140 °F) |

¹⁾ Evaluated by Eurofins, not by UL.

Powering

Operating power ¹⁾

| | |
|---|--|
| Protective extra-low voltage (PELV) version | 15–35 V DC, 24 V AC $\pm 20\%$ 50/60 Hz, max. current 2 A (power supply is galvanically isolated) Fuse size for power supply: 3 A Isolation voltage: 500 V AC, 1000 V DC |
|---|--|

| | |
|-------------------------------|---|
| PELV power cable temp. rating | $\geq +80\text{ }^{\circ}\text{C}$ (+176 $^{\circ}\text{F}$) |
|-------------------------------|---|

| | |
|--------------------------|---|
| AC (mains) power version | 100–240 V AC 50/60 Hz, max. current 1 A (power supply is galvanically isolated) Fuse size for power supply: 10 A Isolation voltage: 1500 V AC |
|--------------------------|---|

| | |
|-------------------------------|---------------------------|
| AC (mains) power cable length | 2.5 m (approx. 8 ft 2 in) |
|-------------------------------|---------------------------|

| | |
|-----------------------------|--|
| Power over Ethernet version | Power over Ethernet (PoE) IEEE 802.3at Type 2 Class 4 Max. current 600 mA, max. power consumption 25.5 W Isolation voltage: 500 V AC, 1000 V DC |
|-----------------------------|--|

Typical current consumption at +20 °C (+68 °F) (U_{in} 24 V DC) ²⁾

| | |
|---|-------|
| Base consumption (no display, analog outputs, or communication) | 50 mA |
|---|-------|

| | |
|--------------|---------|
| With display | + 60 mA |
|--------------|---------|

| | |
|----------------------------|--------------------|
| With voltage analog output | < 2 mA per channel |
|----------------------------|--------------------|

| | |
|----------------------------|---------------------|
| With current analog output | + 21 mA per channel |
|----------------------------|---------------------|

| | |
|-------------|------------------|
| With relays | + 9 mA per relay |
|-------------|------------------|

| | |
|-------------------------------|---------|
| With Ethernet cable connected | + 15 mA |
|-------------------------------|---------|

| | |
|-----------------------|--------|
| With barometer module | + 5 mA |
|-----------------------|--------|

¹⁾ The power supply option is selected when ordering the transmitter.

²⁾ For the current consumption of the connected measurement device, see the device's documentation, available at docs.vaisala.com.

User interfaces

| | |
|-----------------|--|
| User interfaces | Web interface, optional touchscreen display, optional Vaisala cloud connectivity for remote monitoring ¹⁾ |
|-----------------|--|

| | |
|---------------------|---|
| Supported languages | English, Chinese (simplified), Chinese (traditional), French, German, Japanese, Spanish |
|---------------------|---|

| | |
|------------------|---------------------------|
| Optional display | 5" capacitive touchscreen |
|------------------|---------------------------|

| | |
|--------------------------------------|--|
| Integrated data logging capabilities | Non-volatile memory, at least 10 years' storage with 24 h interval logging |
|--------------------------------------|--|

¹⁾ Available only for transmitters ordered with software configuration for Vaisala cloud connectivity.

Inputs and outputs

| | |
|-------------------------------------|--|
| Transmitter service port connection | <ul style="list-style-type: none"> • Connection to Insight software with USB2 and cable 262195SP or with cable 219690 ¹⁾ • Connection to Indigo80 with cable 262195SP |
|-------------------------------------|--|

Analog input ²⁾

| | |
|---------------------|---|
| Available ranges | 4–20 mA |
| Resolution | 6 μA |
| Display resolution | 0.01 mA |
| Accuracy | $\pm 0.05\text{ mA}$ |
| Input impedances | 200 Ω |
| Isolation | Isolated from power supply |
| Overload protection | 40 mA max. (reverse polarity protected) |

Analog outputs ²⁾

| | |
|---|---|
| Number of analog outputs | 4 |
| Isolation | Isolated from power supply |
| Selectable voltage output types | 0–1 V, 0–5 V, 0–10 V, scalable |
| Selectable current output types | 4–20 mA, 0–20 mA, scalable |
| Max. wire size | 2.5 mm ² (14 AWG) |
| Accuracy of analog outputs at +20 °C (+68 °F) | $\pm 0.05\%$ full scale |
| Temperature dependence | $\pm 0.005\%$ / $^{\circ}\text{C}$ full scale |

External loads:

| | |
|-----------------|---------------------|
| Current outputs | $R_L < 500\ \Omega$ |
|-----------------|---------------------|

| | |
|--------------|---------------------------|
| 0–1 V output | $R_L > 2\ \text{k}\Omega$ |
|--------------|---------------------------|

| | |
|--------------------------|----------------------------|
| 0–5 V and 0–10 V outputs | $R_L > 10\ \text{k}\Omega$ |
|--------------------------|----------------------------|

Relay outputs ²⁾

| | |
|--|------------------------------|
| Number and type of relays | 2 pcs, SPDT |
| Max. switching power, current, voltage | 30 W, 1 A, 40 V DC / 28 V AC |
| Max. wire size in PELV version | 2.5 mm ² (14 AWG) |
| Max. wire size in AC (mains) version | 1.5 mm ² (16 AWG) |

Ethernet interface

| | |
|--|---|
| Supported standards | 10BASE-T, 100BASE-TX |
| Connector | 8P8C (RJ45) |
| Supported protocols | Modbus TCP/IP (port 502), HTTPS (port 8443) |
| Vaisala cloud connectivity ³⁾ | Requires outbound TCP port 443 and UDP port 123 |

¹⁾ Vaisala Insight PC Software for Windows® available at vaisala.com/insight.

²⁾ Not available in transmitters that are powered with Power over Ethernet (PoE).

³⁾ Available only for transmitters ordered with software configuration for Vaisala cloud connectivity.

Compliance


| | |
|-------------------------------------|--|
| EU directives and regulations | EMC Directive (2014/30/EU) Low Voltage Directive (2014/35/EU) RoHS Directive (2011/65/EU) as amended by 2015/863 |
| Electromagnetic compatibility (EMC) | IEC/EN 61326-1, industrial environment CISPR 32 / EN 55032, Class B |
| Electrical safety | IEC/EN 61010-1 |
| Type approvals | DNV GL certificate no. TAA000032M EU RO Mutual Recognition certificate no. MRA000004F |
| Compliance marks | CE, China RoHS, FCC, RCM, UKCA |
| Listing marks | UL Listed (USA and Canada) |
| FCC compliance | FCC Part 15, Class B |



Spare parts

| | |
|---|-------------|
| Cable gland, M20×1.5, 5.0–9.0 mm (0.20–0.35 in) | ASM213670SP |
| Cable gland, M20×1.5, 10.0–14.0 mm (0.39–0.55 in) | ASM215414 |
| Cable gland with split bushing, M20×1.5 ¹⁾ | 262632SP |
| Cable gland, M16×1.5, 2.0–6.0 mm (0.08–0.24 in) | ASM213671SP |
| Conduit fitting, M20×1.5 for NPT1/2" conduit | 214780SP |
| Sintered filter (for barometer module) | DRW010335SP |

1) With 7-mm (0.28 in) hole for cable and 14-mm (0.55 in) hole for 8P8C (RJ45) connector to pass through.

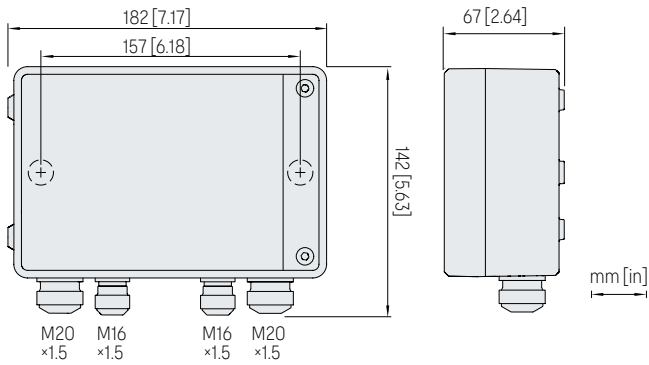

Indigo520 dimensions and lead-through sizes


Accessories

| | |
|---|-------------------|
| Retrofit mounting plate | DRW252186SP |
| Installation kit for pole or pipeline | 215108 |
| Installation kit with weather shield | 215109 |
| Indigo500 spatter guard | ASM214526 |
| M12 - M8 service cable 1.5 m (4.9 ft), for connecting to Indigo80 | 262195SP |
| Vaisala Indigo USB adapter and M12 - M8 service cable, for connecting to Insight software | USB2 and 262195SP |
| M8 - USB service cable, for connecting to Insight software | 219690 |

Probe connection cables

| | |
|--|-----------------|
| Probe connection cable, 0.3 m (approx. 12 in), open end ¹⁾ | CBL210896-03MSP |
| Probe connection cable, 1 m (approx. 3 ft 3 in), open end ¹⁾ | CBL210896-1MSP |
| Probe connection cable, 3 m (approx. 9 ft 10 in), open end ¹⁾ | CBL210896-3MSP |
| Probe connection cable, 5 m (approx. 16 ft 5 in), open end ¹⁾ | CBL210896-5MSP |
| Probe connection cable, 10 m (approx. 32 ft 10 in), open end ¹⁾ | CBL210896-10MSP |

1) The usable length outside of the transmitter enclosure is approx. 0.1 m (4 in) shorter than the total length of the cable.

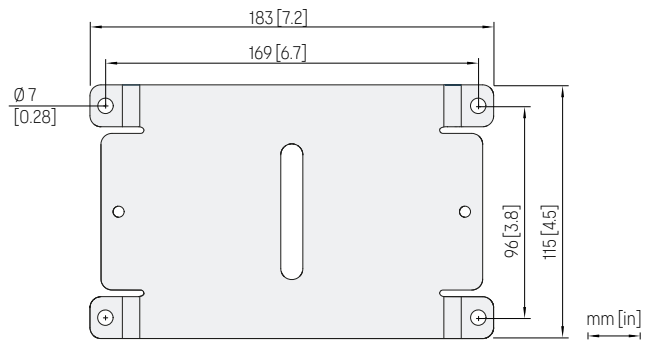

Indigo500 retrofit mounting plate dimensions

VAISALA

Published by Vaisala | B211735EN-U © Vaisala 2025

All rights reserved. Any logos and/or product names are trademarks of Vaisala or its individual partners. Any reproduction, transfer, distribution or storage of information contained in this document is strictly prohibited. All specifications – technical included – are subject to change without notice.



Distributed by:

Kenelec Scientific Pty Ltd
1300 73 22 33
sales@kenelec.com.au
www.kenelec.com.au