



® Knowledge Beyond Measure.

# OmniCount™ Portable Water-Based Condensation Particle Counter

3001

3002

Models 3001 and 3002



## Water-based, Orientation Independent, Portable, Versatile

When you need accurate ultrafine particle (UFP) / nano-particle counts and concentration measurements, both **OmniCount™** Portable Water-based Condensation Particle Counters provide versatile, portable, and cost-effective solutions.

Built for real-world use, both **OmniCount™** PWPCs maintain measurement accuracy during movement and tilting and operate for more than four hours on battery power, making them suitable for both mobile and stationary applications where power may be limited. Bluetooth® LE connectivity enables seamless, wireless data monitoring for efficient workplace and field application, and lab workflows.

By using distilled water instead of butanol or isopropyl alcohol, the **OmniCount™** models simplify operation, reduce consumable costs, and improve safety and sustainability. This makes them cost-effective and affordable solutions that require minimal training, making them ideal for all monitoring applications, teaching laboratories, and expanding research teams seeking reliable UFP and nano particle measurements in a lightweight, easy-to-use instrument.

The dual-channel model 3002 allows simultaneous comparison of UFP concentrations in two nearby environments, making it ideal for applications like real-time respirator fit assessment in workplace or, Simulated Workplace Protection Factor Studies (WPFs/SWPFs), indoor/outdoor air quality assessments and more.

## Features and Benefits

- Single channel (3001), or dual-channel (3002)
- Lightweight, wearable/portable and battery-operated
- Detects particles ranging from <10-1,000 nm
- >4 hr battery operation (at 20 °C / 68 °F) and plug-in power options for flexibility
- Hot-swappable battery
- Easy data management with Bluetooth® LE and USB-C, on-board data storage with three different operation modes, PC software for data collection, access and export
- Suitable for various particle concentration levels (up to 200,000 particles/cm<sup>3</sup>)
- Cost-effective and environmentally friendly, uses distilled water, each CPC samples at 0.1 L/min
- Integrates seamlessly with the OmniTrak™ platform for multi-location and multi-parameter monitoring

## Applications

- Personal exposure monitoring
- Indoor and outdoor mobile monitoring
- Field and remote measurement campaigns
- Indoor air quality investigations
- Work area monitoring
- Point source location
- Cabin air quality investigations
- Academic research and teaching

Additional applications (model 3002 only):

- Fit assurance testing for respirators
- Filtration performance testing
- HVAC evaluation



## Specifications

# OmniCount™ Portable Water-Based Condensation Particle Counter

Models 3001 and 3002

### Number of Channels

1 (3001) or 2 (3002)

### Sample Flow Rate

0.1 L/min (each channel)

### Particle Size Detection ( $D_{50}$ )

<10 nm

### Particle Size Range

10-1000nm

### Concentration Range:

0 to 200,000 #/cm<sup>3</sup>

### Concentration Accuracy\*

±20%

### Channel to Channel Agreement

±15% (wicks at equivalent saturation states)

### Zero Count Performance

<0.01 #/cc, for  $T_{Mod} < T_{Sample Dewr} \sim 75\% RH$

### Response Time

$t_{10-90} < 2s$

### Environmental Operating Conditions

8-38°C (46-100°F)

75-105 kPa / 0.75-1.05 bar / 10.9-15.2 psi

0-90% RH (non-condensing)

### Wick Life

Typically > 8 h, but dependent on sample RH

### Battery Life

>4 hours at 20°C (68°F)

### Data Storage Capacity

Mode / Model	3001	3002
Standard Mode	29 hours	24 hours
Fit Test Mode	N/A	19 hours
High Frequency Mode	20 hours	11 hours

### Weight

3001: 0.85 kg (1.87 lbs)

3002: 1 kg (2.2 lbs)

### Dimensions

16 cm x 12 cm x 8 cm (6.6 in. x 4.7 in. x 3.1 in.)

\*At 25°C, with fully saturated wicks. Absolute accuracy decreases with two or more of the following occurring simultaneously: partially saturated wicks, elevated temperatures, and elevated concentrations, as indicated by pulse ratio status.



Distributed by:

Kenelec Scientific Pty Ltd  
1300 73 22 33  
sales@kenelec.com.au  
www.kenelec.com.au




Knowledge Beyond Measure.

TSI Incorporated - Visit our website [www.tsi.com](http://www.tsi.com) for more information.

USA Tel: +1 800 874 2811  
UK Tel: +44 149 4 459200  
France Tel: +33 1 41 19 21 99  
Germany Tel: +49 241 523030

India Tel: +91 80 67877200  
China Tel: +86 10 8219 7688  
Singapore Tel: +65 6595 6388

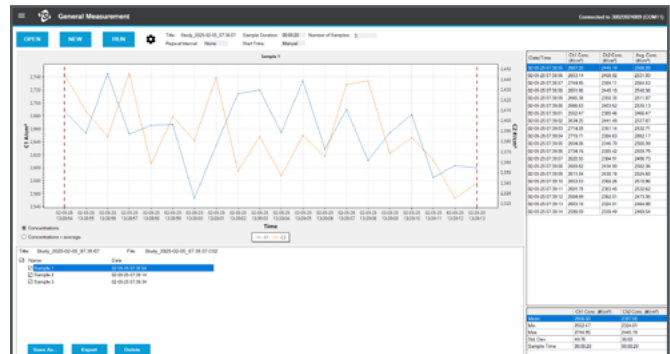

TSI® OmniCount™ Software

### Bluetooth® LE Module Specifications for Taiwan Compliance:

RF Module Brand Name	u-blox
RF Module Model	NINA-B306
RF Frequency Range	2400-2480 MHz
RF Band	2.4 GHz, 40 channels
NCC ID	CCAI19LP1670T0

### To Order

Specify	Description
3001	Single-channel OmniCount™ Portable Water-based Condensation Particle Counter (PWPC)
3002	Dual-channel OmniCount™ Portable Water-based Condensation Particle Counter (PWPC)
300X-WICKKIT	Set of two replacement wicks
3002-BATTERY	Spare battery pack
3002-BATTCHARGER	2 port external battery charger

Specifications are subject to change without notice.

The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by [licensee name] is under license. Other trademarks and trade names are those of their respective owners.

TSI, the TSI logo are registered trademarks of TSI Incorporated in the United States and may be protected under other country's trademark registrations.

